
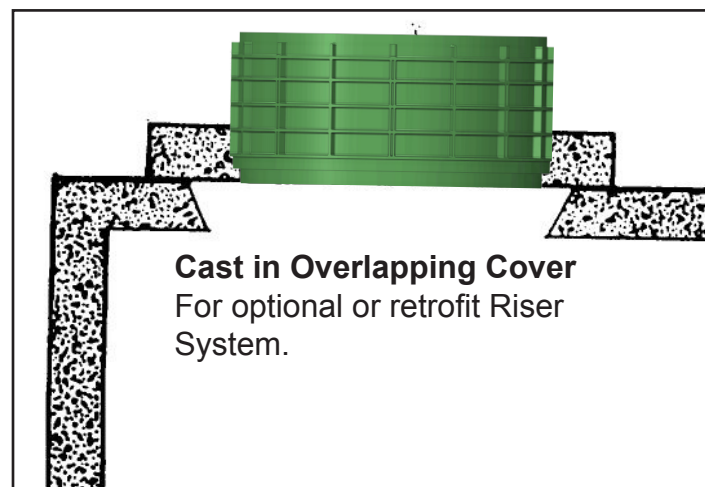
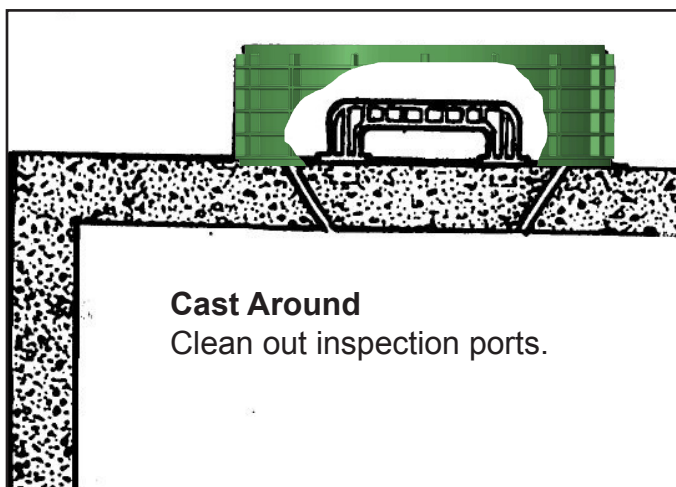
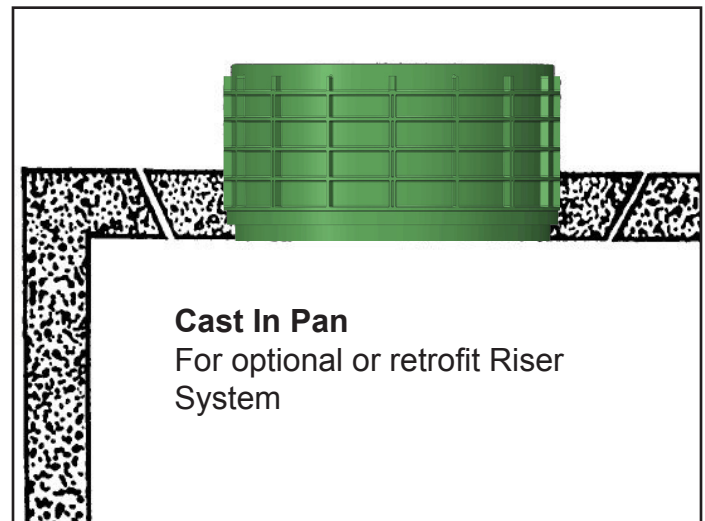



Casting Variations.

IMPORTANT!

Lid should be in place when casting riser.

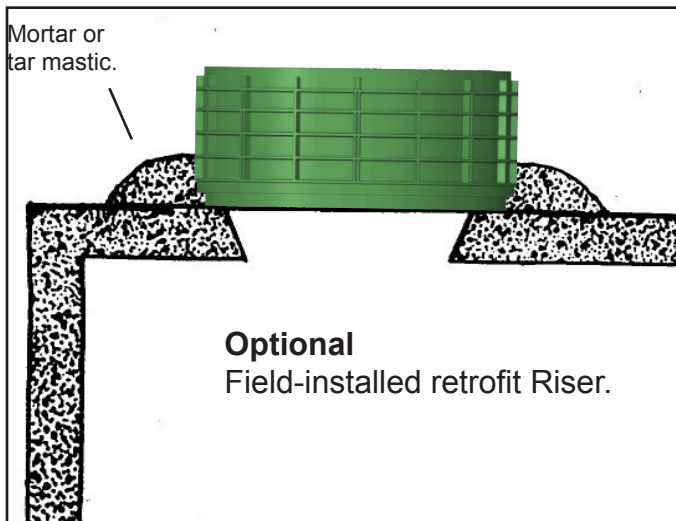

20" Round Riser
cast in concrete.

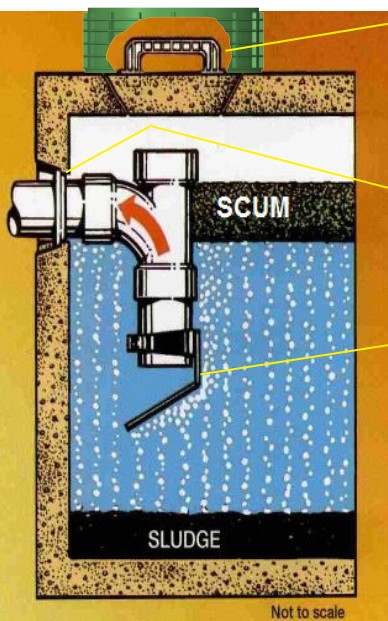

12", 16", 20" & 24" Risers Stackable. Watertight. Gastight.

Extend septic tanks to grade faster and easier than ever. Tuf-Tite Round Risers provide a 6" or 12" rise. Simply stack as many as needed to reach your desired level. They interlock firmly for quick, accurate stacking.

Choose 12", 16", 20" or 24" models. All are molded of rugged, non-corrosive polypropylene, with ribbed construction for exceptional strength. Heavy-duty lid interlocks on the top riser.


12", 16", 20" and 24" diameters

All Round Risers are either 6" or 12" in height (installed).



Interlocking Domed and Flat Lids, with molded-in gaskets, are available for all sizes.

Patent Numbers:
5,617,679 & 5,852,901;
others pending.

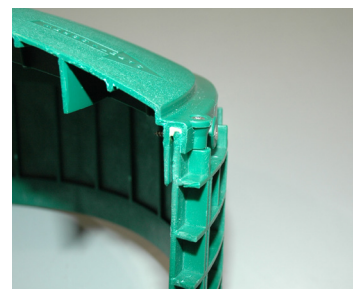

Interlocking design
Sidewalls interlock easily for accurate stacking. No special connectors needed. Interlocking risers may be made watertight and gas-tight with field installed butyl sealant.



Screw-on gasketed lid.
A heavy duty Domed Lid interlocks on the top riser. It can be screwed down with stainless steel screws (provided). Simply line up the screw holes on the lid with the special screw channels on the riser sidewall.